

Yu-Fit Battery Configurator Tool



User Guide





If you experience any problems contact
Technical Support on 1300 361 161

Introduction

With the introduction of new CO₂ production control systems such as smart charging and Idle Start Stop (ISS) it is essential that the vehicle has the correct battery type and specification installed.

An increasing number of automotive manufacturers have introduced systems that now require a replacement battery to be correctly configured to the vehicle after installation.

Failure to configure the correct specification battery could result in:

- Undercharging or overcharging of the battery resulting in damage which is not covered by the manufacturer's warranty
- Loss of the ISS CO₂ production control system functionality
- Possible loss of non-critical vehicle system functions

Battery configuration prevents incorrect battery charging, ensures the correct operation of the ISS CO₂ production control system and prevents the loss of non-critical vehicle systems.

The Century Yu-Fit battery configurator tool allows the configuration process to be carried out on a growing number of vehicles equipped with new technology smart charge and ISS systems.

The configuration process therefore:

- Informs the vehicle that a new battery has been installed
- Informs the charging system of the new battery characteristics
- Ensures the vehicle uses the correct charging parameters for the new battery




Before the Century Yu-Fit battery configurator can be used it must be registered & the supporting application suite installed on your computer.

Refer to Yu-Fit "Registration & Application Suite Installation Guide" for more information.

Yu-Fit Registration

Before you can use the Century Yu-Fit Battery Configurator tool it must be registered.

To register you must first download the Yu-Fit application suite using the link found at www.centurybatteries.com.au

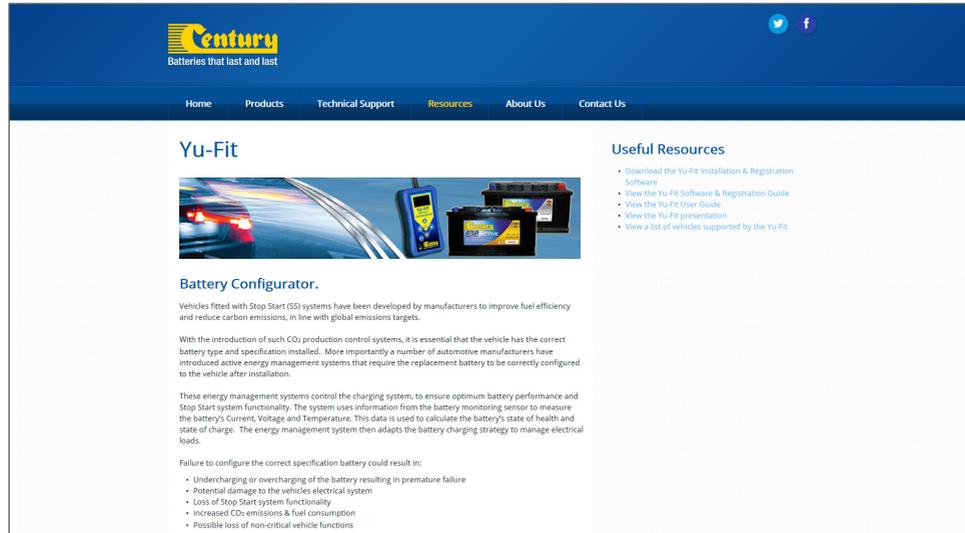

Once the application suite has been successfully installed follow the on-screen instructions to complete the registration process.

By registering the product you will be able to take advantage of the following:

- Product and technical updates via email
- Notification of application updates for the Century Yu-Fit Battery Configurator.

Yu-Fit Navigation


Navigation around the OLED display screen is controlled using the multi-functional key pad which consists of:

- Four arrow buttons (Up, Down, Left & Right)
- OK button
- ESC button



Yu-Fit Connection

Once the vehicle battery has been replaced the Century Yu-Fit Battery Configurator tool should be connected to the vehicle via the 16 Pin J1962 EOBD diagnostic plug.

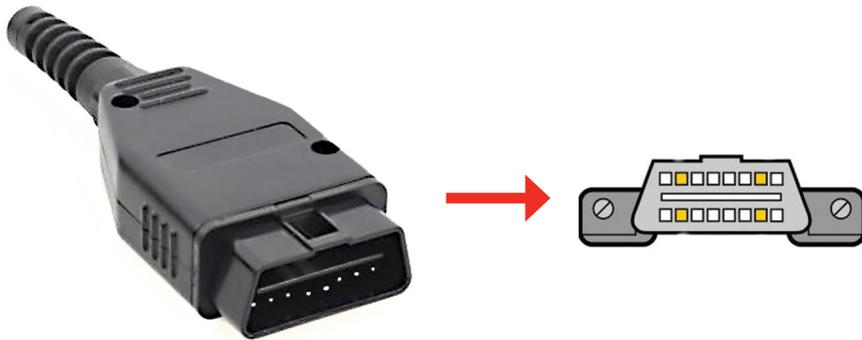

Yu-Fit LCD Icons



Diagnostic/Vehicle Selection

Select this to enter Vehicle Specific Serial Diagnostics function.



System Setup

Select this to configure the various settings of the Yu-Fit.



Information

Select this to display software and hardware information.



Clock

Select this to view and if necessary set the date and time.

Selecting the System Setup icon displays the System Setup Menu which allows the Yu-Fit user to adjust settings and carry out system tests if required.



Garage/Workshop Information

Select this to display your user details. These can be edited using the PC suite.



Volume

Select this to turn the sounder ON or OFF.



Test

Select this to carry out hardware tests on the Yu-Fit if requested by Technical Support.



Language Selection

Select this to change the language used by the Yu-Fit.



Back

Select this to return to the previous menu.

Yu-Fit Battery Configuration Procedure

When the Century Yu-Fit is connected to the vehicle the Main Menu screen will be displayed.



Using the keypad arrows navigate to the **DIAGNOSTICS** icon and confirm with **OK**.




Select the **BATTERY MANAGEMENT** icon and confirm with **OK**.




Select **VEHICLE SELECTION** and confirm with **OK**.




Select the appropriate vehicle manufacturer from the **SELECT MANUFACTURER** menu and confirm with **OK**.

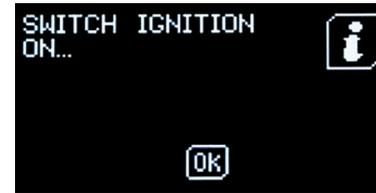

Wait for the vehicle selection to be accepted, switch on the vehicle ignition and confirm with **OK**.

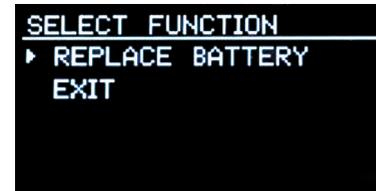

Select the **REPLACE BATTERY** function and confirm with **OK**.

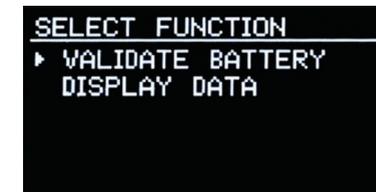

Select the **VALIDATE BATTERY** option from the **SELECT FUNCTION** menu, confirm with **'OK'** and wait for the function to initialise.



Century Yuasa Batteries Pty Ltd

37-65 Cobalt Street, Carole Park, Queensland, 4300

T: (07) 3361 6161 **W:** www.centurybatteries.com.au